

Optimal Path Finding in Dynamic Environment with Application to Vessels and Autonomous Vehicles

Irina Dolinskaya, Ph.D.

Assistant Professor,
Industrial Engineering and Management Sciences,
Northwestern University

April 15, 2010

Optimum Vessel Performance in Evolving Nonlinear Wave-Fields Project

- A five-year project funded by the Office of Naval Research (ONR) Multidisciplinary University Research Initiative (MURI) Grant



Optimum Vessel Performance in Evolving Nonlinear Wave-Fields Project

- A five-year project funded by the Office of Naval Research (ONR) Multidisciplinary University Research Initiative (MURI) Grant
- In collaboration with:
 - The Department of Naval Architecture and Marine Engineering at the University of Michigan
 - The Department of Electrical and Computer Engineering at the Ohio State University
 - The Applied Physics Laboratory at the University of Washington



Optimum Vessel Performance in Evolving Nonlinear Wave-Fields Project


- The goal of this project is to develop a system that can, in real-time, control the behavior of a vessel, based on real-time measurements and forecasts of the *wave-field* surrounding the vessel.

Optimum Vessel Performance in Evolving Nonlinear Wave-Fields Project

- The goal of this project is to develop a system that can, in real-time, control the behavior of a vessel, based on real-time measurements and forecasts of the *wave-field* surrounding the vessel.
- Three objectives:
 - Minimize travel time, thus decreasing operational costs
 - Minimize fuel consumption, consequently reducing environmental effects
 - Minimize vessel motions, thus increasing passengers' comfort and crew's efficiency


Optimum Vessel Performance in Evolving Nonlinear Wave-Fields Project

- Real-Time Measurement of Ocean Wave-Fields

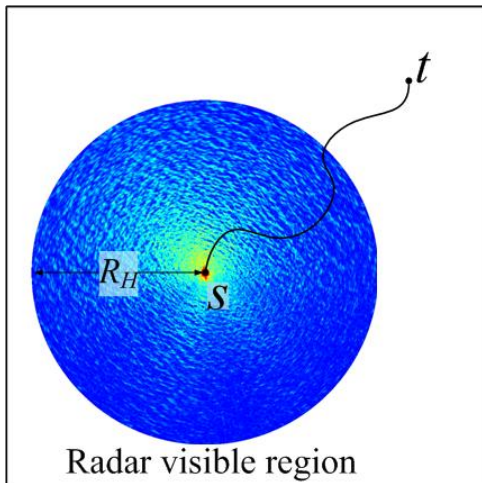


Optimum Vessel Performance in Evolving Nonlinear Wave-Fields Project

- Real-Time Measurement of Ocean Wave-Fields
- Short-Term Forecasts of Evolving Nonlinear Wave-Fields

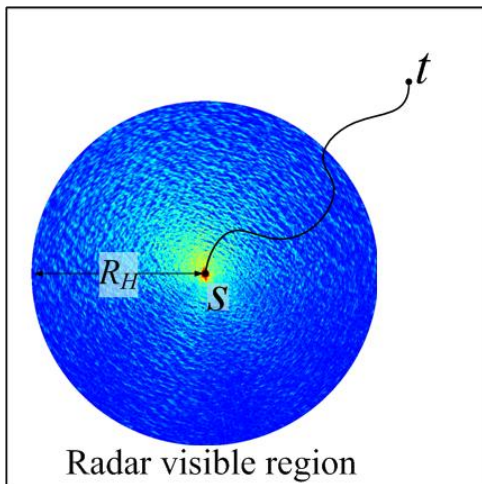


Optimum Vessel Performance in Evolving Nonlinear Wave-Fields Project

- Real-Time Measurement of Ocean Wave-Fields
- Short-Term Forecasts of Evolving Nonlinear Wave-Fields
- Time-Domain Computation of Nonlinear Ship Motions

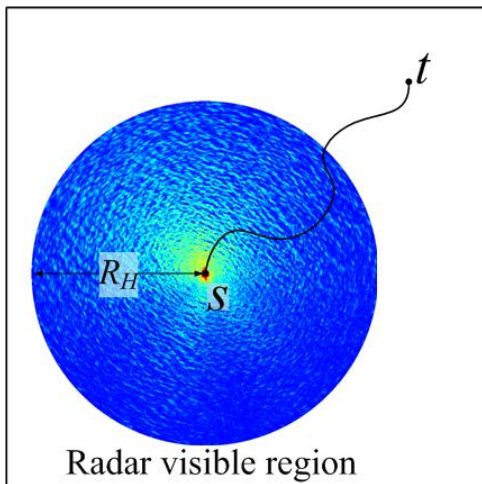

Optimum Vessel Performance in Evolving Nonlinear Wave-Fields Project

- Real-Time Measurement of Ocean Wave-Fields
- Short-Term Forecasts of Evolving Nonlinear Wave-Fields
- Time-Domain Computation of Nonlinear Ship Motions
- Dynamic Real-Time Path Optimization and Vessel Control

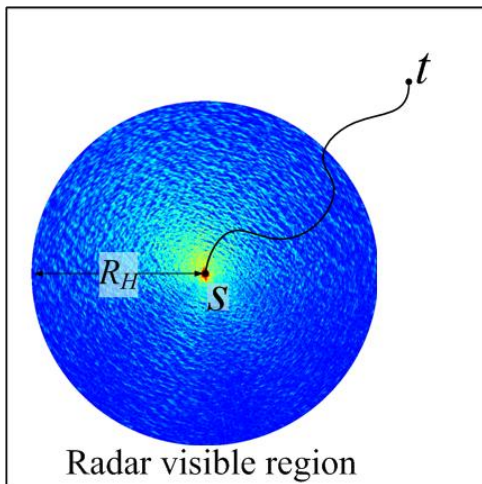

Problem Characteristics

- The cost function (vessel speed) and operability constraints are not available in closed form, and an optimal path cannot be found analytically.

Problem Characteristics

- The cost function (vessel speed) and operability constraints are not available in closed form, and an optimal path cannot be found analytically.
- Direction-dependent environment causes cost functions to violate triangle inequality.

Problem Characteristics

- The cost function (vessel speed) and operability constraints are not available in closed form, and an optimal path cannot be found analytically.
- Direction-dependent environment causes cost functions to violate triangle inequality.
- Information about the surrounding environment is available up to the radar visibility horizon.

Problem Characteristics


- The cost function (vessel speed) and operability constraints are not available in closed form, and an optimal path cannot be found analytically.
- Direction-dependent environment causes cost functions to violate triangle inequality.
- Information about the surrounding environment is available up to the radar visibility horizon.
- A minimum turning radius function constrains the curvature of feasible paths and problem controllability.

Problem Characteristics

- The cost function (vessel speed) and operability constraints are not available in closed form, and an optimal path cannot be found analytically.
- Direction-dependent environment causes cost functions to violate triangle inequality.
- Information about the surrounding environment is available up to the radar visibility horizon.
- A minimum turning radius function constrains the curvature of feasible paths and problem controllability.
- Small run-time of an optimal path finding algorithm is essential for real-time implementation.


Dynamic Programming Model

- The dynamic programming model evaluates the fastest paths to each point on the border of the radar visible region, then our results for time and space homogeneous environment find the best path to continue to the target point.

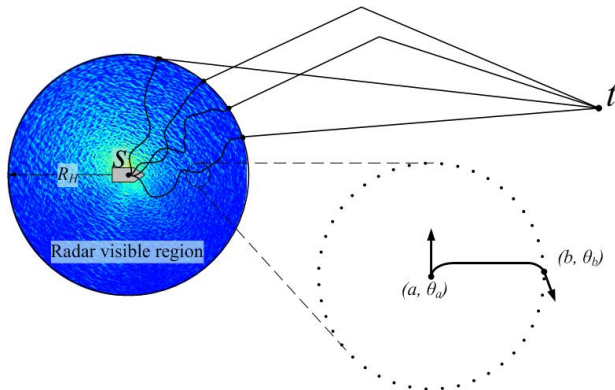


Dynamic Programming Model

- As the mobile agent moves along a path, the information about surrounding environment is updated, and an optimal path is continuously reevaluated.

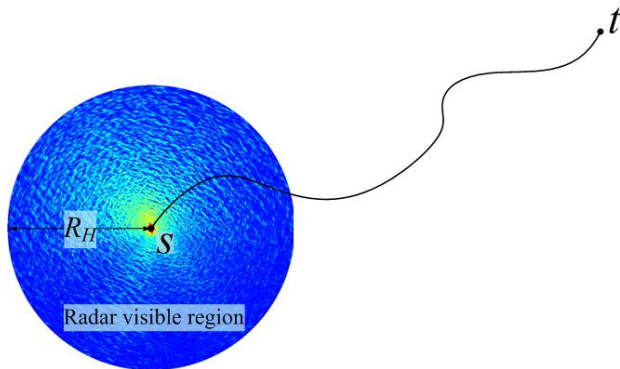


Dynamic Programming Model

- As the mobile agent moves along a path, the information about surrounding environment is updated, and an optimal path is continuously reevaluated.

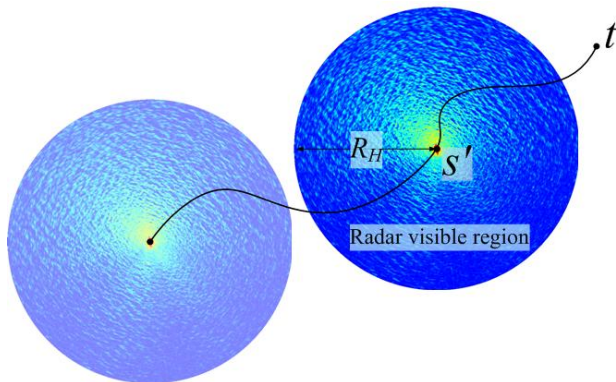

Application and Numerical Results

- S-175 Containership
- $R_H = 2500$ meters
- Nominal ship speed = 11.4 m/s
- Global sea state No. 6.5 (Sig. wave height 7 m)
- Maximum attainable speed range is [8.4, 10.3] m/s
- $l = 250$ metres

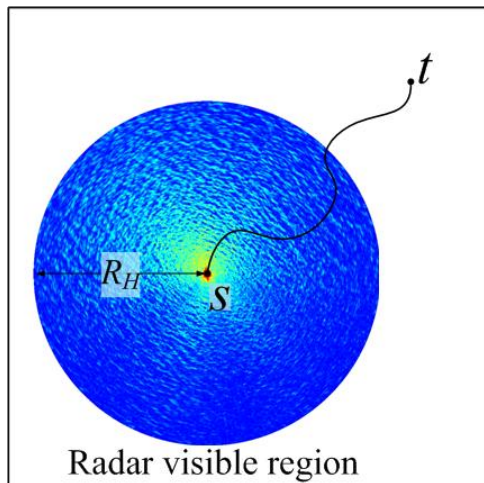

Optimal Path Numerical Results

- Up to 9.5% improvement

Optimal Path Numerical Results

- Up to 9.5% improvement
- On average between 4% and 6% improvement over implementing our results for the case neglecting radar collected data.


Optimal Path Numerical Results

- Up to 9.5% improvement
- On average between 4% and 6% improvement over implementing our results for the case neglecting radar collected data.
- Due to number of limitations of the current simulation model these estimates are very conservative.


Optimal Path Numerical Results

- Up to 9.5% improvement
- On average between 4% and 6% improvement over implementing our results for the case neglecting radar collected data.
- Due to number of limitations of the current simulation model these estimates are very conservative.
- The DP model not only improves the travel time, but also finds a **control-feasible** path.


Test Run Number 5: $\theta_{st} = 80$ degrees

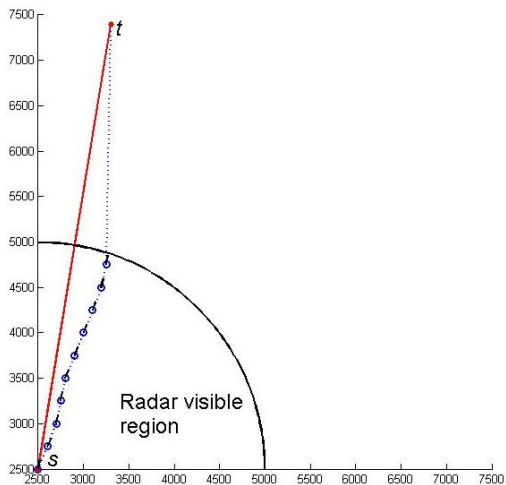


Test Run Number 5: $\theta_{st} = 80$ degrees

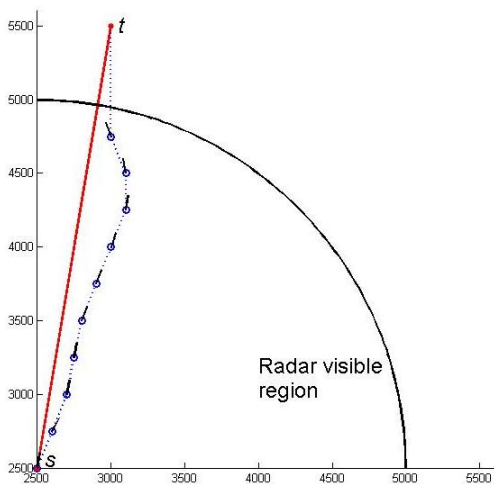

Test Run Number 7: $\theta_{st} = 120$ degrees

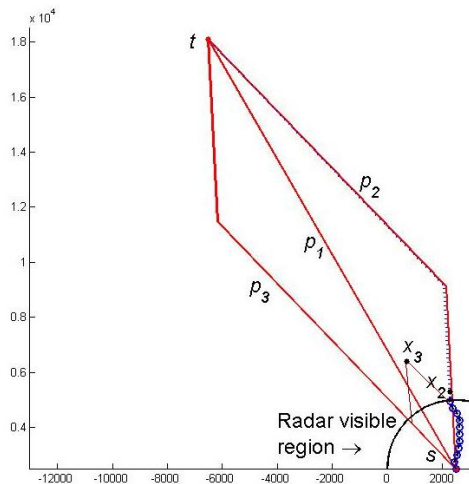

Test Run Number 7: $\theta_{st} = 120$ degrees

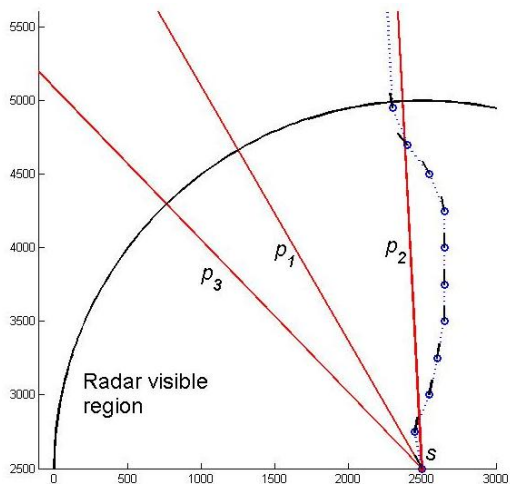


ONR Center for Innovation in Ship Design: Autonomous Navigation of an Amphibious Vehicle




- A Sea Base cargo ship is located off shore.

ONR Center for Innovation in Ship Design: Autonomous Navigation of an Amphibious Vehicle

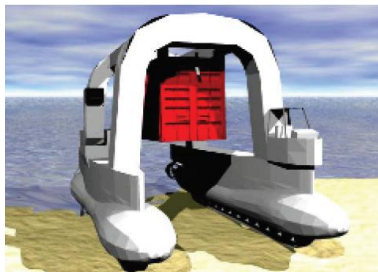

- A Sea Base cargo ship is located off shore.
- Unmanned amphibious vehicles are responsible for transporting the cargo from the ship to the target location inland.

ONR Center for Innovation in Ship Design: Autonomous Navigation of an Amphibious Vehicle

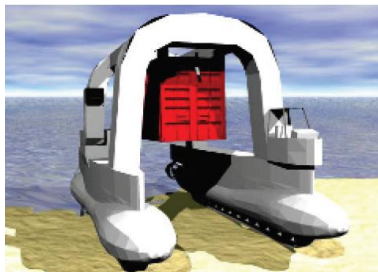

- A Sea Base cargo ship is located off shore.
- Unmanned amphibious vehicles are responsible for transporting the cargo from the ship to the target location inland.
- The selected path has to minimize travel time while avoiding dangerous regions, and must dynamically adjust as new information about the surrounding environment is obtained.

Unmanned Aerial Vehicles (UAVs)

- Optimal path finding for UAVs and other autonomous systems while integrating real-time dynamic environment (e.g., wind).
- Uncertainty in the environment and accuracy of the collected data.



